


GIB Lighting ballast PRO-CMH 315 W

Technical data

- Insulation voltage: 3 KV
- Insulation resistance: > 4MOHM
- Reactive voltage test: 190 V
- Lamp current : 3,15a tolerance +/- 7%
- Ipeak/Irms.: < 1,8
- Impedance: 60
- COS-FI: 0,90
- Max losses (T.AMB.25°C): 27 W
- Energy efficiency: 92,00%
- TW °C: 130
- dT °C: 65°C


- * Self extinguishing plastic box IP20
 - * Protection class I
 - * Timed controlled ignition with status led
 - * 2 Led monitor life status lamp
 - * Max distance to lamp 16 meters
 - * Electromagnetic ballast with winding class H
- * TESTED IN CONFORMITY : EN61347-1-2-9 ; EN60923 ; EN60626 ; EN55015 ; EN60555/2

Size

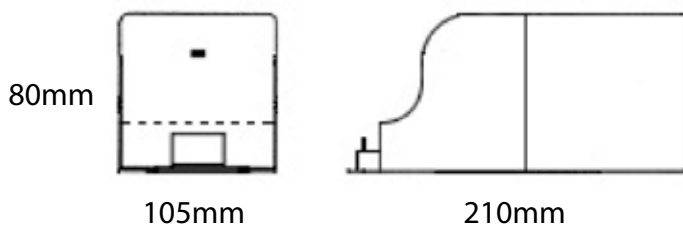

Weight : 4,9 Kg

Wiring

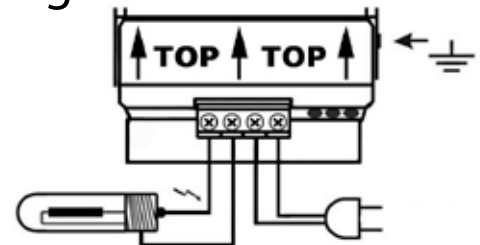

Ignitor: integrated

Ignition voltage: > 4,5KV
 Impulse amplitude: 10 uS

Type: semiparallel

Peak amplitude 90%: 3 uS
 Pulse for cycle : 1